


Certi-label product 3" minimum 6" minimum Bottom or Apron flashing Head flashing Typical chimney flashing not requiring soldering Step flashing 3" Caulking minimum overlap Caulking Recommended step flashing width Typical chimney Shakes Shingles flashing requiring Horizontal width 2 1/2" soldering 2 1/2" Vertical width Solder joints

Figure 14c: Typical Projection Flashing

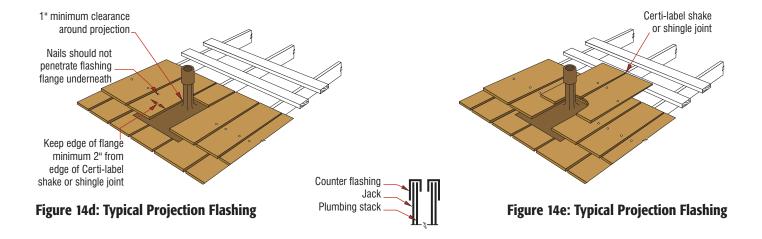

Figures 14a-14e: Flashing Details for Typical Roof Projections