
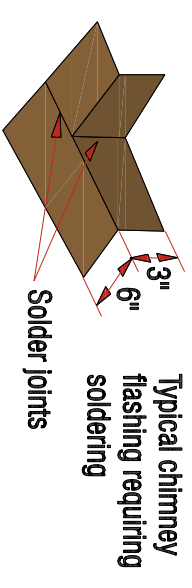
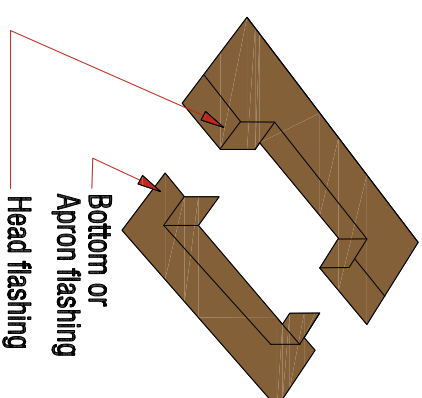


Typical chimney flashing
not requiring soldering
Step flashing 3"
minimum overlap

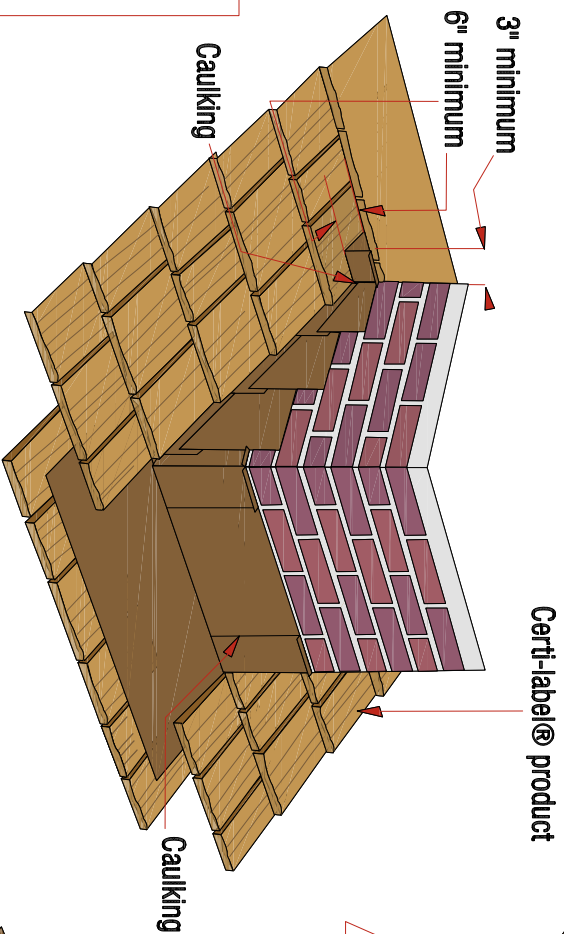

Recommended step flashing width

	Shakes	Shingles
Horizontal width	4"	2 1/2"
Vertical width	3"	2 1/2"

Note: Check with your local building code official for minimum gauge/thickness requirement and step-flashing height.

Figure 14C: Typical Projection Flashing