


Option 3:

A continuous ventilation product may be used beneath the Certi-label® roofing material (See Figures 21c and 21d). The CSSB does not require the use of a continuous ventilation product: it is one of many options to consider (see previous page).

Continuous ventilation products come in a variety of designs/formats. Consult your supplier and the continuous ventilation product manufacturer for application and installation instructions specific to its product. Ask for details regarding warranty and air flow guarantee based on test results. Ask how testing was performed.

Figure 21c: Continuous Ventilation Product (mesh type)
(Option 3 Depicted)

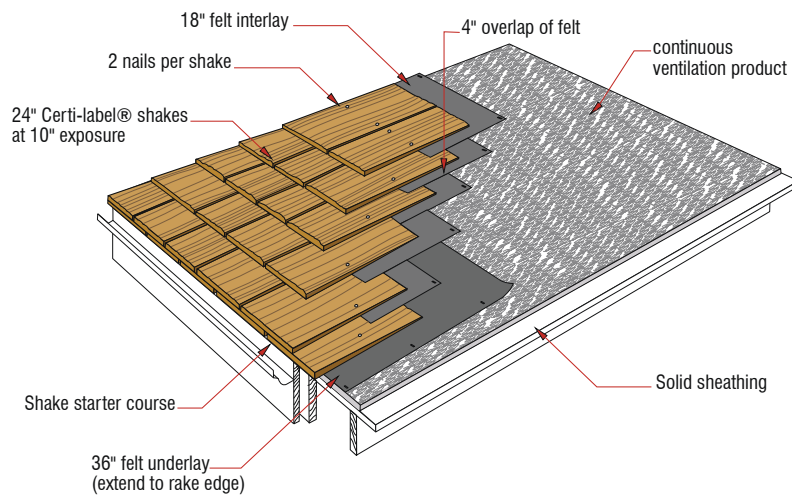

NOTE:
Good ventilation is essential. Ridge and soffit vents are recommended.
Correct cedar shake and shingle installation practices are important and continuous ventilation products, if used, need to be part of a properly installed roofing system.

Figures 21a-d Show Shake Application. Do Not Interlay Shingles With Felt

Figures 21c - 21d For Continuous Ventilation Product Options

Figure 21d: Continuous Ventilation Product (rigid type)
(Option 3 Depicted)

